


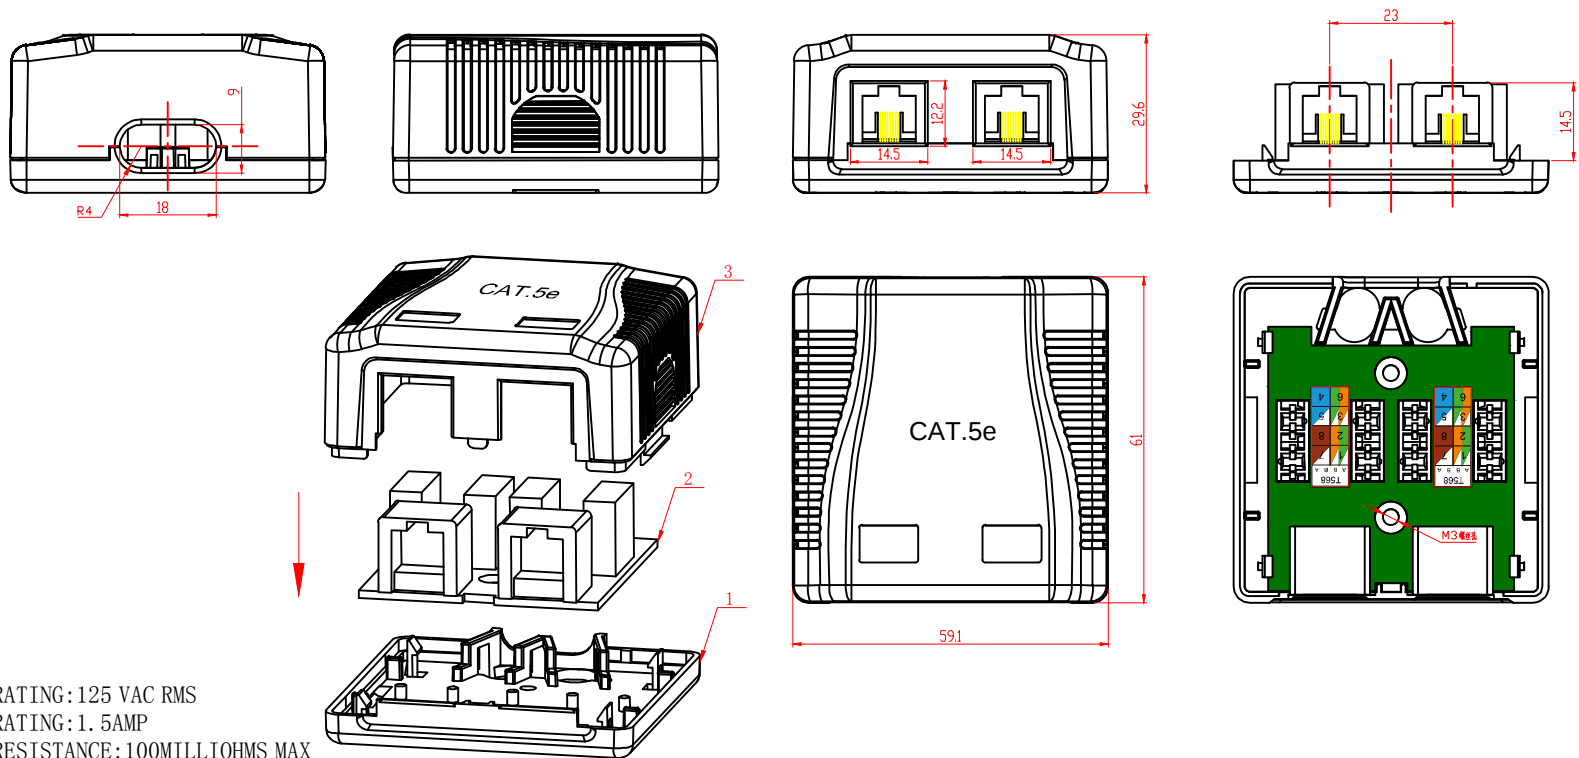

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1. 5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40°TO+85°
2. OPERATION:0°TO70°

MECHANICAL:

1. HOUSING MATERIAL:ABS
2. INSERT MATERIAL:FAME RETARDANCY ABS
3. PCB MATERIAL:FR-4 T=1. 6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0. 30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0. 50mm WITH TIN PLATING
6. RJ45 JACK ; IFE:750 TIMES MIN

											
					Material		ABS			Item No.	235114
SYM	Number	Bill No.of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	2-Port Cat.5e Surface Mount Box
Drawn	Ding jian bo	2016.1.14	Tolerance			A4	X:1	mm	ERP	Part No.	
Checked	Ge pei jun	2016.1.14	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- angle ±0.25 ±90°								
Approved	Wang wei jun	2016.1.14									
					Sheet	1 OF 1	Version: A/0				