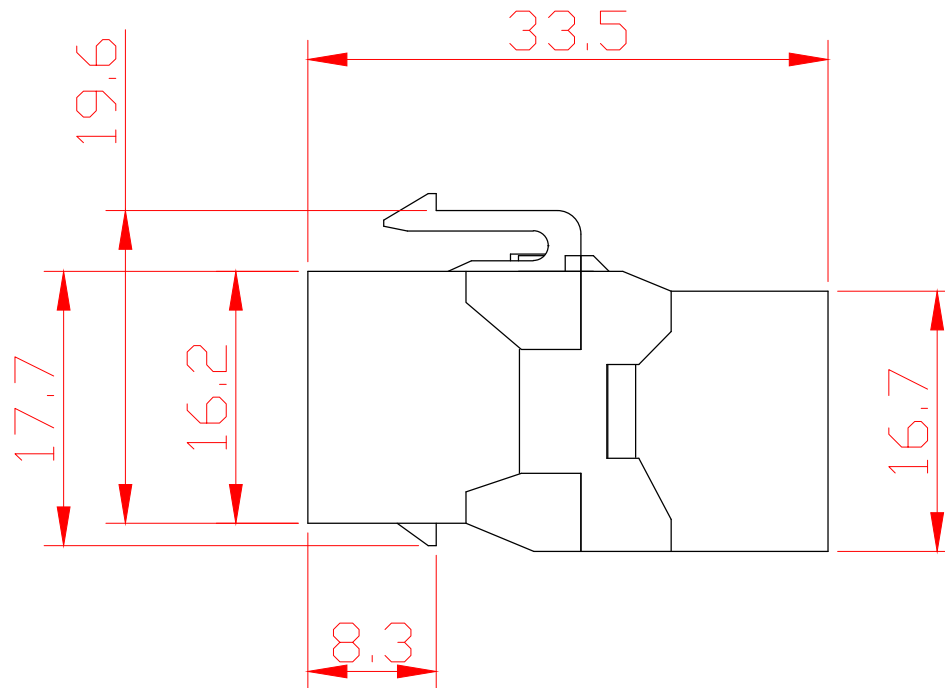
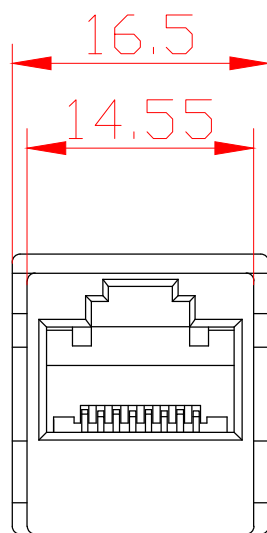


NOTES:

ELECTRICAL:


1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO +85°
2. OPERATION: 0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL: PC
2. INSERT MATERIAL: ABS
3. PCB MATERIAL: FR-4 T=1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP
PIN T=0.30mm
5. RJ45 JACK LIFE: 750 TIMES MIN

											
					Material					Item No.	125580
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	Cat. 6A Unshielded Keystone Inline Coupler
Drawn	Ding jian bo	2015.12.29	Tolerance			A4	X:1	mm	ERP	Part No.	
Checked	Ge pei jun	2015.12.29	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00-100.00 ±0.25 Angle ±30°								
Approved	Wang wei jun	2015.12.29									