



NO.112182

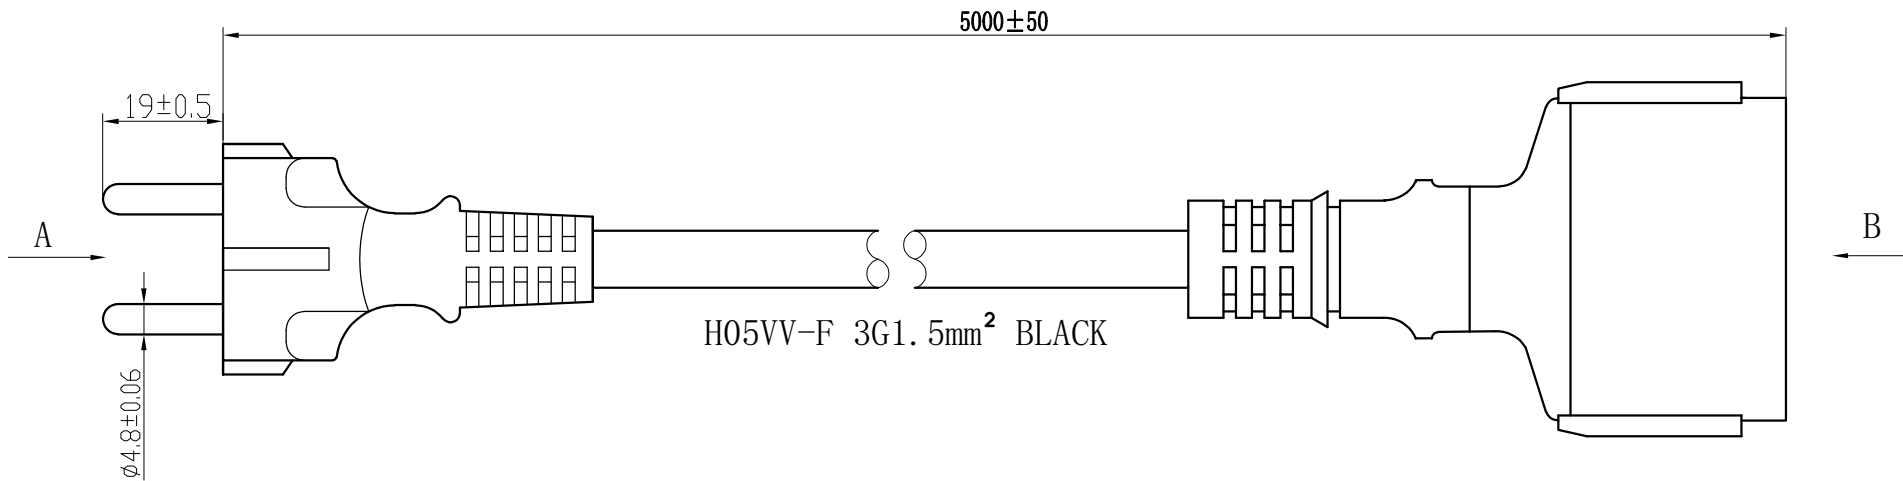


A Direction

B Direction

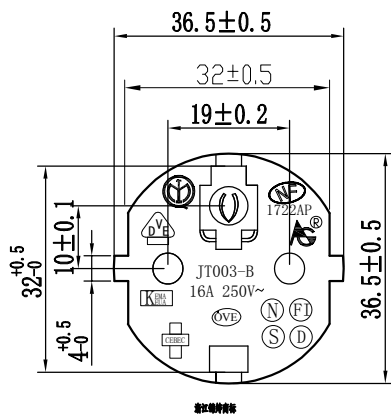

浙江雄峰商标

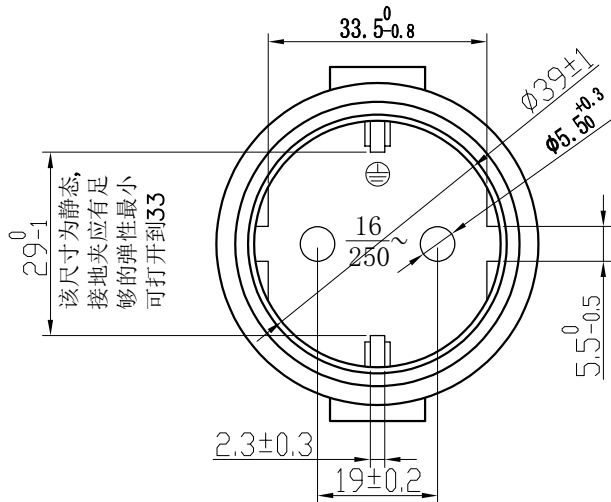

该尺寸为静态, 接地夹应有足够的弹性最小可打开到33

Notes:

1.Plug:JT003-B/GZF3-16 Clear injection no scrath and dirt;

2. Cable:H05VV-F 3G1.5mm² Jacket $\phi 8.0 \pm 0.2$ Conductor 48* 0.198 ± 0.004 Core $\phi 3.0 \pm 0.1$;

Cable Mark: $\triangleleft$ VDE $\triangleright$ H05VV-F 3G1.5mm²  ZHEJIANG JINTONG NUCLEAR CABLE CO., LTD

3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than $5M\Omega$, no strike out;

TOLERANCE ACCORDING TO THIS FORM UNLESS OTHERWISE INDICATED		第二角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张	
尺寸标注 DIMENSION	TOLERANCE		版本 VERSION	A	比例 PROPORTION	1:4:1
	长度 LENGTH	角度 ANGLE	文件位置 FILE LOCATION			
<200	±0.1	±0.5°	图号 FIGURE NO			
200~500	±0.3		版本号 REV. NO			
500~800	±0.5		备注材料: REMARK MATERIALS			
<800	±1.0		公差带 DIMENSIONAL			
备注 REMARK	PRODUCTOR NAME					
审核 AUDIT						
批准 APPROVAL						