



129409 Professionelles modulares Crimpwerkzeug

Product Images

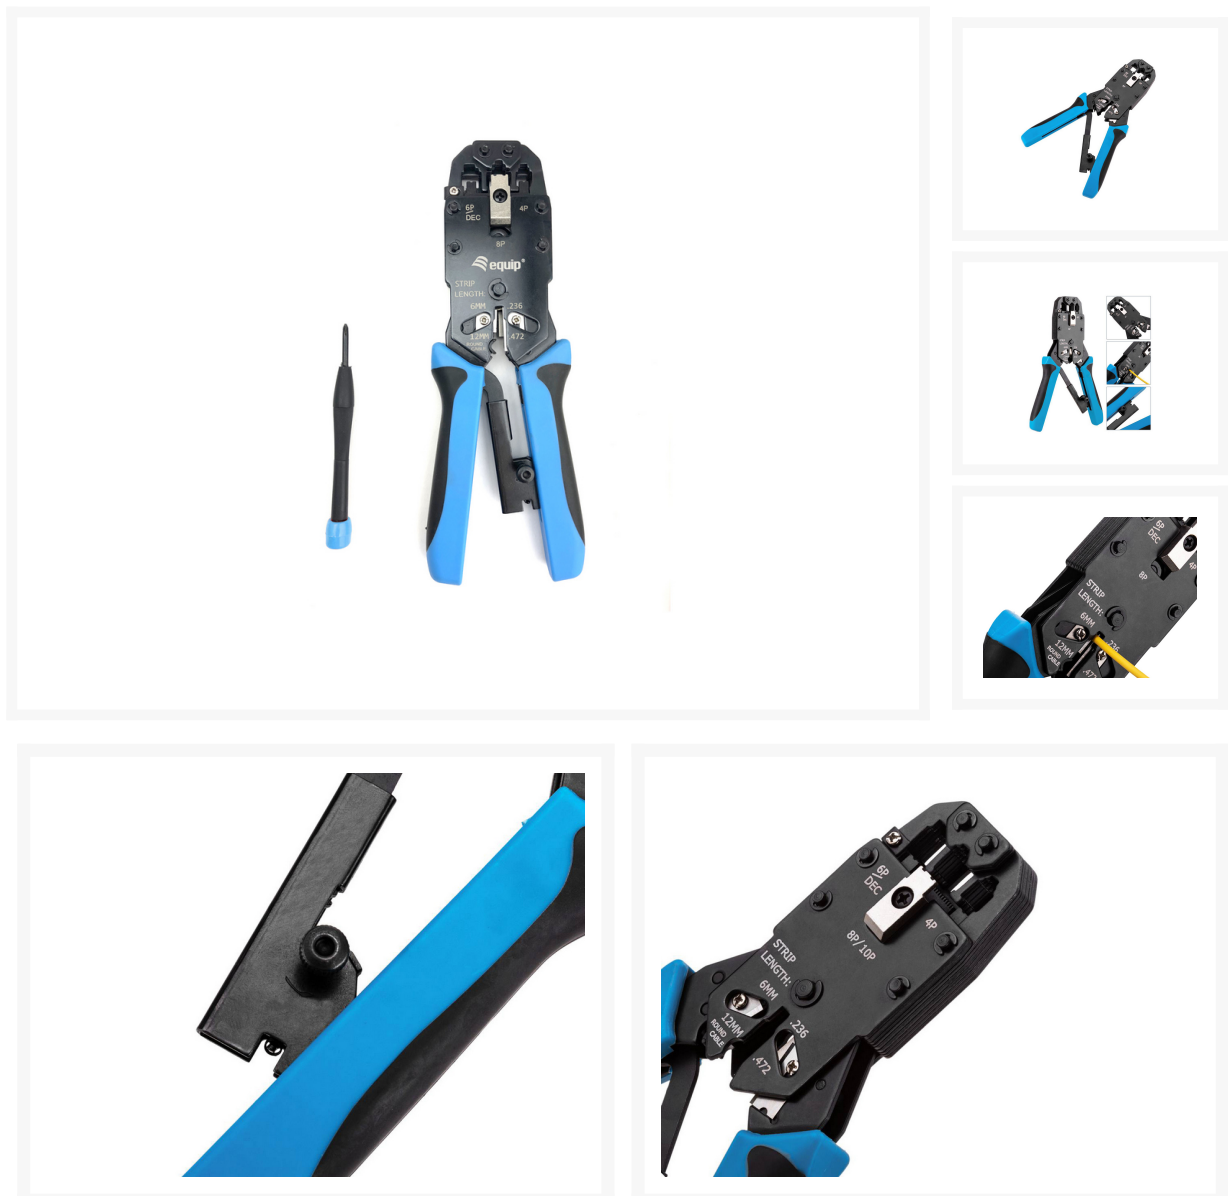

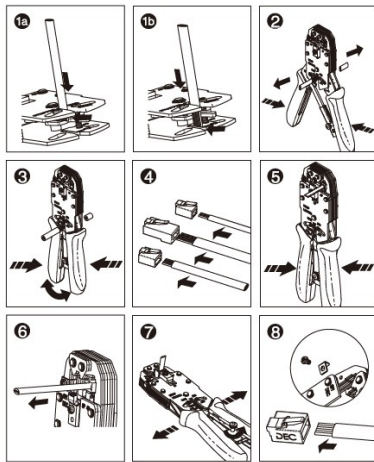

Instructions

- To open the handles squeeze handles until it stops.
- (1a) Insert the 4P or 6P cable from the two-bladed side of the stripper until it touches the stop guide (stripping length 6mm).
- (1b) Insert the 8P cable between the two stripper blades and let it extend a little over the lower cut blade.
- (2) Squeeze handles until stop, keep the cable perpendicular and then pull from the tool.
- (3) Insert round cables into the round stripping hole, squeeze handles until stop, turn the tool in counter clockwise direction and the cable in clockwise direction simultaneously, pull from the tool.
- (4) Insert the stripped cable into the plug and make sure that the left wire at one end matches the right wire at the other end.
- (5) Place the modular plug with cable into the tool's holder. Be sure the stripped wire is between the tab and the gold contacts. Squeeze the handles until stop.
- (6) Remove the crimped plug from the tool.
- (7) To release the ratchet turn the screw on the ratchet in counterclockwise direction.
- (8) To crimp DEC plugs remove the screw on the left side of the 6P holder, insert the DEC plug with cable into the 6P holder and squeeze handles until stop.



Short Description

- Mit Abisolier- und Schneidfunktion
- Geeignet für 4P/2C, 4P/4C, 6P/4C, 6P/6C, 8P/8C- und DEC-Modularstecker
- Geeignet für RJ45-, RJ12-, RJ11- und DEC-Modularstecker
- Mit Ratschenfunktion
- Hochwertige Metallausführung
- Schraubendreher enthalten

Description

Die professionellen Equip Modular Crimpzangen sind robust und vielseitig. Sie werden auch mit Abisolier-, Schneid- und Ratschenfunktion geliefert, um sie noch leistungsfähiger zu machen.

Additional Information

Code des Harmonisierten Systems (HS)	820320
Zolltariflicher Warencode (TARIC)	8203200000
Farbe	Blau
EAN	4015867227794
Modellnummer	129409
Dimensions (W x D x H).	72.5 x 23 x 204 mm
Produktgewicht (kg)	0.525
Zulassungen und Konformität	RoHS
Lieferumfang	129409

