


USB Print Server

Product Images



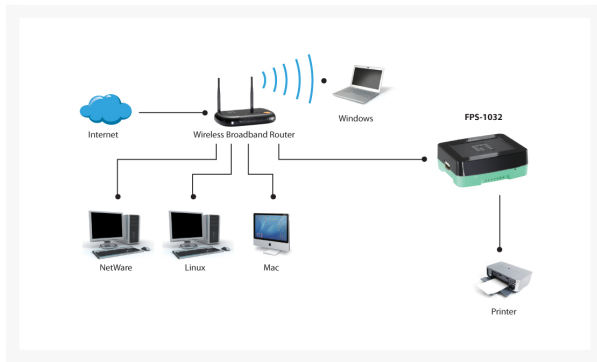

Short Description

USB Printer Server für gemeinsame Druckernutzung im Netzwerk USB-2.0-Schnittstelle
Einfaches Einrichten über benutzerfreundliche Oberfläche Unterstützt verschiedene
Netzwerk-Druckprotokolle Unterstützt verschiedene Betriebssysteme

Description

Product Overview The LevelOne FPS-1032 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network. This print server is equipped with a 10/100Mbps autosensing Ethernet port and a USB 2.0 port that connected to USB printer. **Multi OS and Network Printing Protocol Support** The FPS-1032 1-port USB print server supports Windows ME/NT/2000/XP/2003/Vista and Win7 operating systems as well as Mac OS 8.1 and higher, UNIX/Linux and Netware (Bindery/NDS). Network Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB over TCP/IP for flexible use with different network clients connected to the same office network. The FPS-1032 also includes Internet Printing Protocol (IPP) support and Windows Print Monitor Technology to monitor printing jobs received. **Easy Installation Wizard** The LevelOne FPS-1032 is easily configurable using a Web Browser or Windows based configuration program included with the CD-ROM. The print server is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the windows set-up program or the Web based user interface.

Additional Information

Fast-Ethernet RJ45	1
Code des Harmonisierten Systems (HS)	851762
Zolltariflicher Warencode (TARIC)	8517620000
Features.	Network Print Protocol Support : LPR,RAW TCP,IPP,SMB AppleTalk Netware Bindery/NDS Print Monitor printing
Printer Interface.	USB
Flash-Speichergröße	2 Mbytes
Indikator	LAN LED USB LED
Stromversorgung	Power adapter
Power supply included.	Ja
Arbeitsspeichergröße	16 Mbytes DDR2
Standards	IEEE 802.3, 802.3u Ethernet Standards
Zulassungen und Konformität	CE, FCC
Operating humidity.	0% RH ~ 70% RH
Operating temperature.	0°C ~ 45°C
Unterstützte Betriebssysteme	Windows ME/NT/2000/XP/2003/Vista/Win7 Mac OS 8.1 and higher UNIX/Linux and Netware (Bindery/NDS).
Storage humidity.	0% RH ~ 80% RH
Storage temperature.	-5°C ~ 65°C
Lieferumfang	FPS-1032 Netzadapter Quick Installation Guide Ressource CD (Bedienungsanleitung, Hilfsprogramm, QIG)
Farbe	Schwarz
EAN	4015867142233
Modellnummer	FPS-1032
Dimensions (W x D x H).	64.8 x 73.2 x 24.9 mm
Produktgewicht (kg)	0,52

