

A

B

C

D

E

F

1

1




12 CORE FIBER OPTIC PIGTAIL LC/UPC 50/125 OM3 LSZH

2

2

LC/UPC 0.9mm Connector

- 1 Blue
- 2 Orange
- 3 Green
- 4 Brown
- 5 Gray
- 6 White
- 7 Red
- 8 Black
- 9 Yellow
- 10 Purple
- 11 Pink
- 12 Aqua

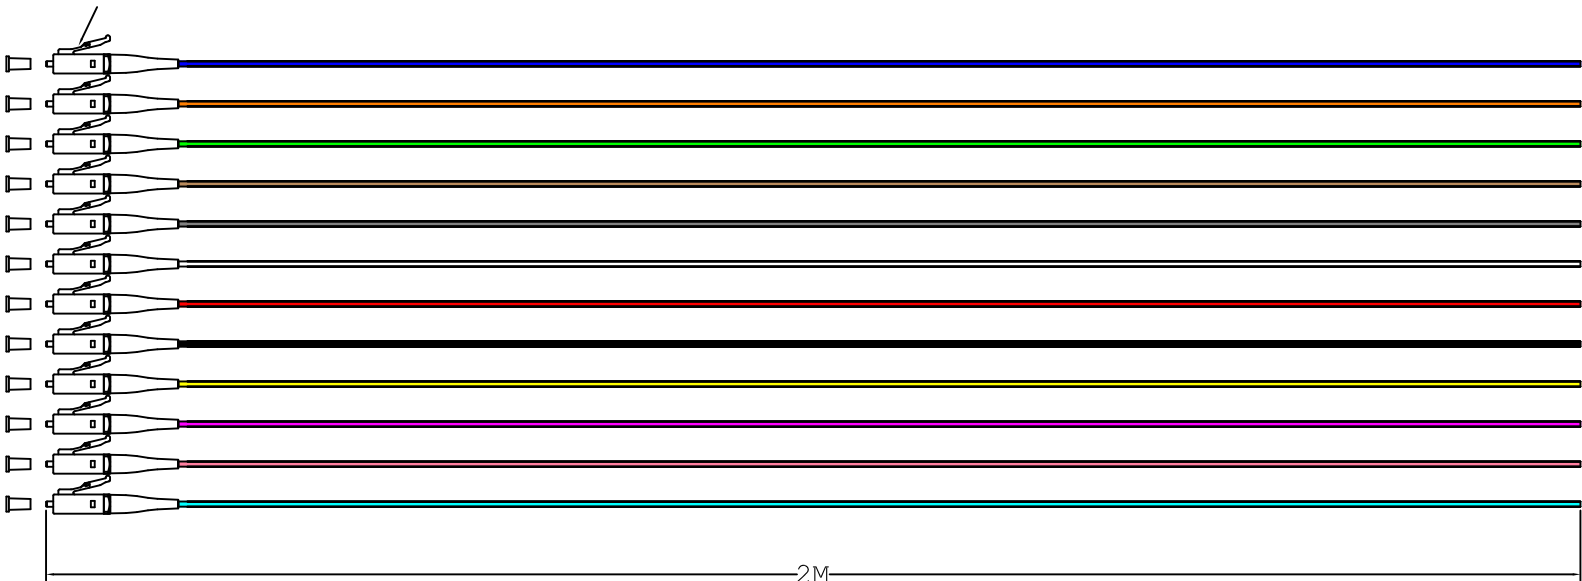

3


3

4

4

5

5

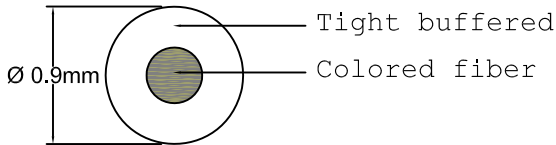

Length Tolerance:

Length(M)	Total Length Tolerance
L≤1	+5CM/-0
1<L≤10	+10CM/-0
10<L	+L1%/-0

Specifications:

Fiber Mode	MM
Type	LC/UPC
Cable Diameter(mm)	Ø 0.9
Cable Color	12Color
Core Diameter(um)	50/125
Insertion Loss(dB)	≤0.25
Return Loss(dB)	≥20
Operating Temperature(℃)	-20~+70
Storage Temperature(℃)	-20~+70

6

6



UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE			
LINEAR		ANGULAR	
X.X	±0.5	X°	±1°
X.XX	±0.10	X°X'	±30
X.XXX	±0.050	X°X'X''	±15
REMOVE ALL SHARP EDGES AND ALL BURRS			
DO NOT SCALE			
UNIT: MILLIMETERS			

255631 / 255632 / 255633

MATL:	DRAW: WR	DATE: 2025.04.16
FINISH:	CHECK: ZQ	DATE: 2025.04.16
REF.:	APPR: ZW	DATE: 2025.04.16
THIRD ANGLE PROJECTION	SCALE: 1:1	PART No:1

AP01	NEW REVISION	****	2025.04.16	ECN-#
A	FIRST REVISION	****	2025.04.16	ECN-#
REV.	DESCRIPTION	APVD	DATE	ECN No
DESCRIPTION: Pigtail, LC/UPC 12 Core 50/125 OM3 LSZH				
				10F1

A

C

D

E

F