


| NO.112180

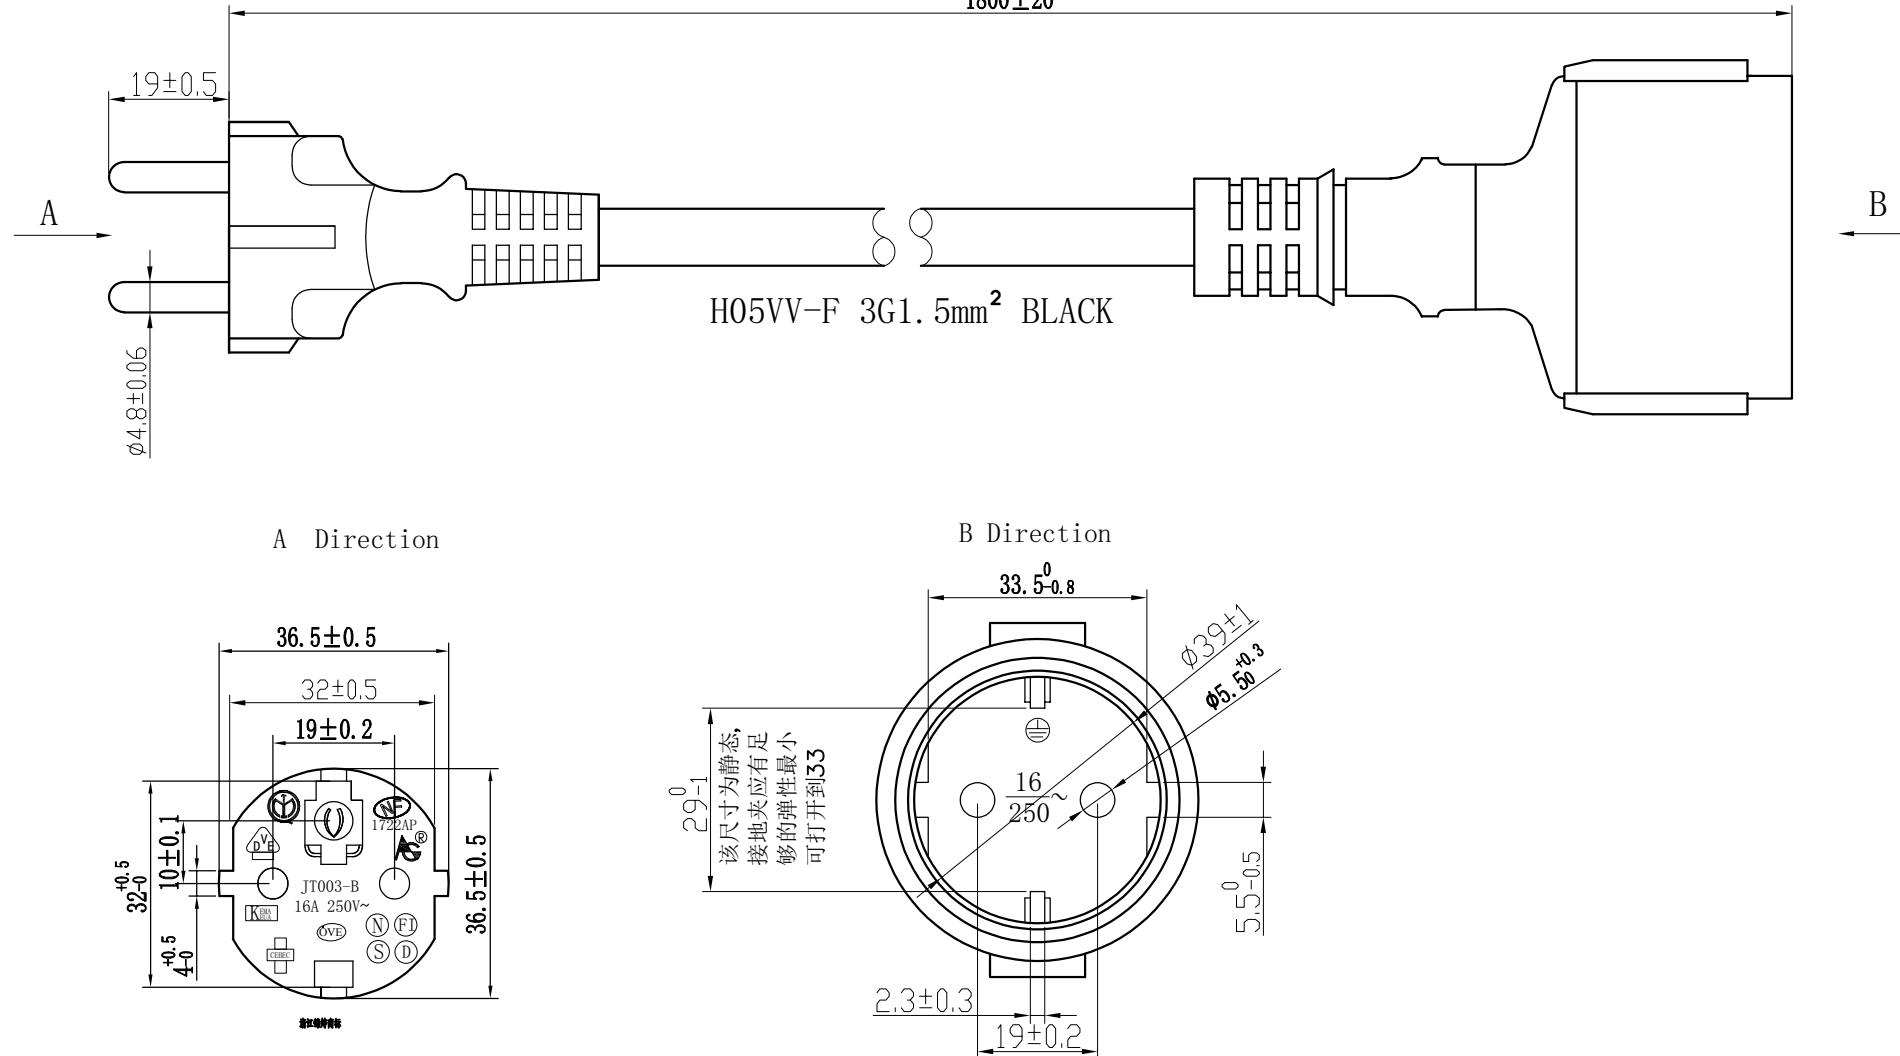

Notes:

1. Plug: JT003-B/GZF3-16 Clear injection no scratch and dirt;
 2. Cable: H05VV-F 3G1.5mm² Jacket ϕ 8.0±0.2 Conductor 48*0.198±0.004 Core ϕ 3.0±0.1; Cable Mark:  H05VV-F 3G1.5mm²  ZHEJIANG JINTING NUCLEAR CABLE CO., LTD
 3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5MΩ, no strike out;

TOLERANCE ACCORDING TO THIS FIRM, UNLESS OTHERWISE INDICATED			第三角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张		
尺寸项 DIMENSION	公差 TOLERANCE		版本 VERSION	比例 PROPORTION	1:4:1	单位 UNIT	mm MAPS	A4
	长度 LENGTH	角度 ANGLE						
<200	±0.1	±0.5°						
200~500	±0.3							
500~800	±0.5							
<800	±1.0							
设计 DESIGN			PRODUTOR NAME	122180				
审核 AUDIT								
批准 APPROVAL								