


**Equip Dynamic Flex 19" Free
Standing Server Cabinet, 47U,
600x1000mm, with Glass
Door, Removable and
Lockable Panels, Assembled,
RAL7035 Grey**

Product Images



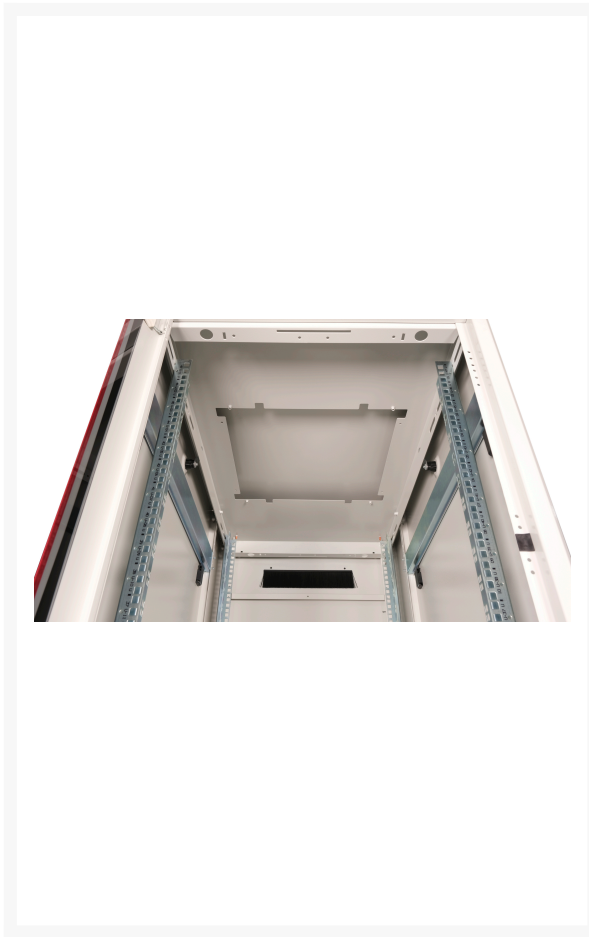

Short Description

- 47U cabinet, designed for optimal performance in every space
- 600X1000MM Server Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a tempered glass frontdoor to provide unmatched strength while maintaining clear visibility
- Sidepanels are removable and lockable
- Backpanel is removable

Description

Introducing the "Dynamic Flex Line" Cabinets: Designed for user-friendly installation of active and passive network components, these cabinets prioritize efficient cable management. Constructed from steel sheets up to 1.5 mm thick, each cabinet ensures exceptional stability, thanks to a unique plate curving technique. They are elegantly finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). In scenarios where the installation location is hard to access, the cabinet can be effortlessly disassembled. Its doors are designed for easy removal, with the flexibility to switch the door stop's orientation from right to left. The cabinet's roof features an additional lid, equipped with air ventilation slots to promote better airflow. It's also prepped for the

addition of an air ventilation unit. Internally, each cabinet boasts two sets (4 pieces) of 483 mm (19") profile rails, which are galvanized and feature height unit markings readable from both directions. These rails are adjustable in depth and come with extra depth support bars, ensuring comprehensive 483 mm (19") equipment installations. A highlight of the design is the emphasis on cable management. The cabinet base incorporates a sliding cable entry panel sealed with rubber. Cabinets of 26U and above are outfitted with two cable entries featuring brush strips at the rear, both above and below the door. The 800 mm width cabinets offer advanced cable management options, including additional cable entries with brushes on the top and base. Additionally, these wider cabinets include vertical cable ducts with shutters on both sides, adjacent to the 483 mm (19") profile rails in the front. To address diverse operational needs, a comprehensive range of accessories, including cable management tools and shelves, is available, ensuring adaptability in everyday use.

Additional Information

Wall mountable.	No
Number of cartons per pallet.	1 piece
Pallet Net Weight.	9000 gram
Pallet Gross Volume.	110160 cubic_centimeter
Package Volume.	88715520 cubic_centimeter
Maximum number of stacking cartons.	1 piece
Pallet Net Depth.	1080 millimeter
Pallet Net Width.	680 millimeter
Pallet Net Height.	150 millimeter
Manual.	Yes
Mounting kit.	No
Max. Weight Capacity.	600 kilogram
Key lock.	Yes
Housing Material.	Steel
Back Door Key Lock.	No
Front Door Key Lock.	Yes
Side panels included.	Yes
Rack rail thickness.	1.5 millimeter
Stabilizing foot screw.	Yes
Number of stabilizing foot screws.	4 piece
Adjustable stand.	No
Monitoring.	No
Main PDU.	No
Side Panel Key Lock.	Yes
Product design.	4-Post
Cooling type.	Passive

Front Door Opening Angle.	120 degree
Removable Side Panels.	Yes
Castor wheels.	No
Rack rails.	Yes
Frame type.	Closed
Feet adjustment.	30 millimeter
Assembly Required.	No
Soundproof.	No
Built-in UPS.	No
Rack Type.	Freestanding rack
Rack capacity.	47U
Removable Back Door.	Yes
Removable Front Door.	Yes
Max. Weight Capacity On Wheels.	600 kilogram
Back Door Construction.	Steel
Front Door Construction.	Tempered glass
Side Panel Construction.	Steel
Number of Layers per Pallet.	1 piece
Pallet Gross Weight.	131800 gram
Harmonized System (HS) code.	853710
Customs product code (TARIC).	8537109899
Carbon Footprint.	20.178 kilogram
Quantity per Pallet.	1 piece
Sustainability Compliance.	Yes
Number of screws.	28
Screws included.	Yes
Wall mounting kit.	No

Temperature sensor.	No
Quantity per Pack.	1 piece
Plinth panel.	No
Nuts included.	Yes
Number of nuts.	28
Package Depth.	1080 millimeter
Package Height.	2416 millimeter
Package Width.	680 millimeter
Grounding kit.	Yes
Quick installation guide.	No
Product Gross Weight.	4800 gram
Adjustable feet.	Yes
Adjustable depth.	No
Cable management.	No
Preassembled.	Yes
Rail to Rail Length.	19 inch
Product Height.	2276 millimeter
Product Width.	600 millimeter
Product Depth.	1000 millimeter
Material Thickness.	34.5 millimeter
Internal Height.	2089 millimeter
Internal Width.	590 millimeter
Min. Rack Depth.	760 millimeter
Max. Rack Depth.	940 millimeter
Internal Depth.	990 millimeter
Product Net Weight.	118000 gram
Package Content.	Grounding set, Lock adapter, Cage nut set

Color.	Light Grey
RAL Code.	RAL7035
Model Number.	EDF-47-6010-G-BIAA

