



**Equip Basic Flex 19" Free
Standing Server Cabinet, 32U,
800x800mm, with Glass Door,
Removable and Lockable
Panels, Assembled, RAL7035
Grey**



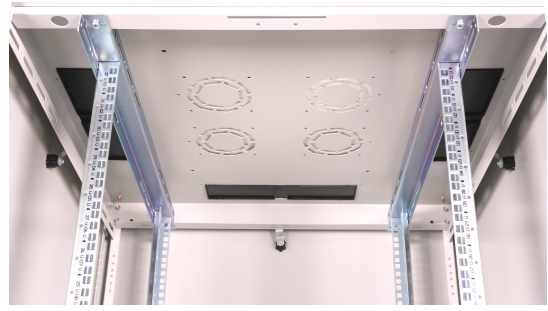

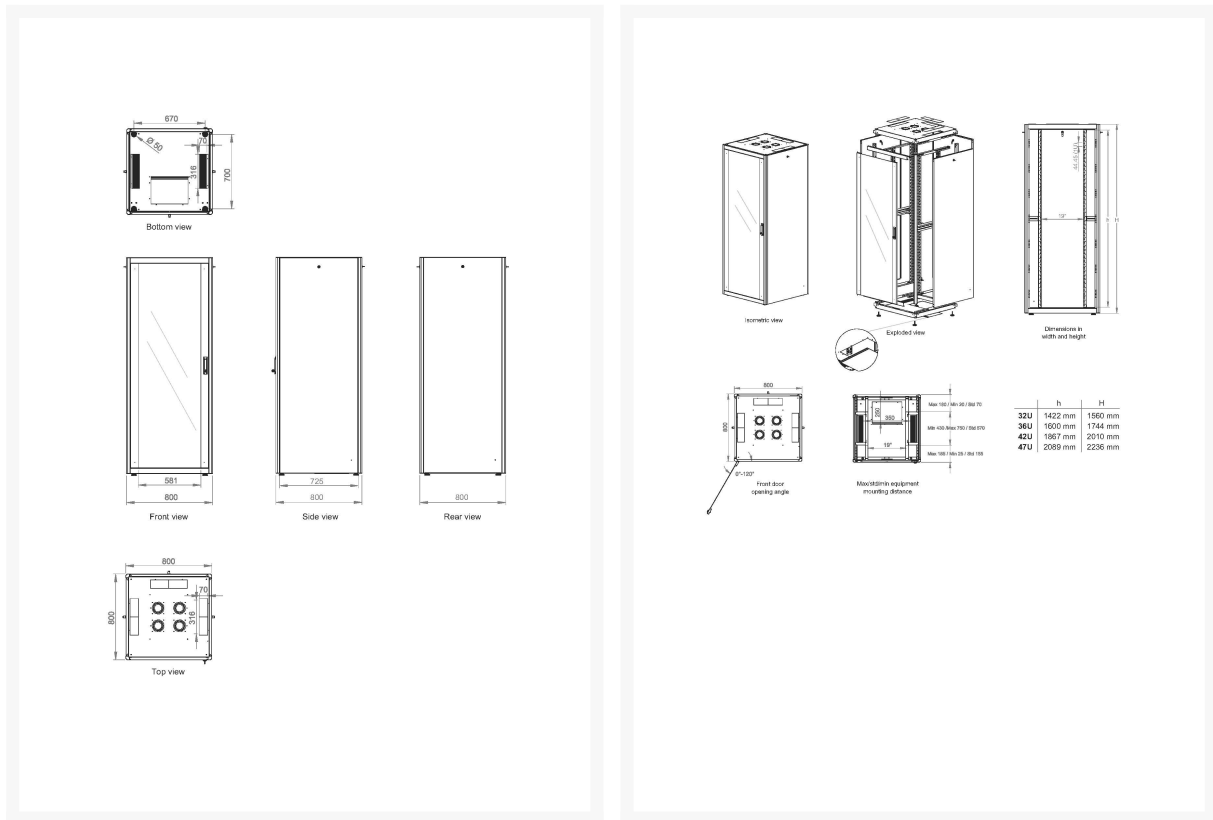

Short Description

- 32U cabinet, designed for optimal performance in every space
- 800X800MM Server Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a tempered glass frontdoor to provide unmatched strength while maintaining clear visibility
- Sidepanels are removable and lockable
- Backpanel is removable and lockable

Description

These cabinets, of the Basic Flex Line, are engineered for the efficient and user-friendly installation of both active and passive network components, prioritizing streamlined cable management. Crafted from steel sheets up to 1.5 mm thick, every cabinet guarantees excellent stability, attributed to a unique plate curving technique, forming a sturdy steel framework. They are finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). For challenging set-up locations that are less accessible, the cabinet is designed to be disassembled. The doors are easily detachable, and their stops can be switched between right and left orientations. Additionally, the roof is prepped for the integration of an air ventilation unit. Inside, each cabinet houses two sets (4 pieces) of 483 mm (19") profile rails. These rails, galvanized and marked with height units readable from both directions, are adjustable in depth. To facilitate extensive equipment installations, they're paired with supplementary depth support bars. Cable management

is central to the design. The cabinet base features a punched-out cable entry shielded with a metal plate. For the broader 800 mm width cabinets, there are added punched-out cable entries covered with plastic on both sides. These entries are replicated on the roof, with a single one for 600 mm width cabinets and three for the 800 mm width ones. To cater to diverse operational needs, a wide assortment of accessories, including cable management tools and shelves, is readily available.

Additional Information

Wall mountable.	No
Number of cartons per pallet.	1 piece
Pallet Net Weight.	13500 gram
Pallet Gross Volume.	116160 cubic_centimeter
Package Volume.	65824000 cubic_centimeter
Maximum number of stacking cartons.	1 piece
Pallet Net Depth.	880 millimeter
Pallet Net Width.	880 millimeter
Pallet Net Height.	150 millimeter
Manual.	Yes
Mounting kit.	No
Max. Weight Capacity.	600 kilogram
Key lock.	Yes
Housing Material.	Steel
Back Door Key Lock.	Yes
Front Door Key Lock.	Yes
Side panels included.	Yes
Rack rail thickness.	1.5 millimeter
Stabilizing foot screw.	Yes
Number of stabilizing foot screws.	4 piece
Adjustable stand.	No
Monitoring.	No
Main PDU.	No
Side Panel Key Lock.	Yes
Product design.	4-Post
Cooling type.	Passive

Front Door Opening Angle.	120 degree
Removable Side Panels.	Yes
Castor wheels.	No
Rack rails.	Yes
Frame type.	Closed
Feet adjustment.	30 millimeter
Assembly Required.	No
Soundproof.	No
Built-in UPS.	No
Rack Type.	Freestanding rack
Rack capacity.	32U
Removable Back Door.	Yes
Removable Front Door.	Yes
Max. Weight Capacity On Wheels.	600 kilogram
Back Door Construction.	Steel
Front Door Construction.	Tempered glass
Side Panel Construction.	Steel
Number of Layers per Pallet.	1 piece
Pallet Gross Weight.	95000 gram
Harmonized System (HS) code.	853710
Customs product code (TARIC).	8537109899
Carbon Footprint.	13.167 kilogram
Quantity per Pallet.	1 piece
Sustainability Compliance.	Yes
Screws included.	No
Wall mounting kit.	No
Temperature sensor.	No

Quantity per Pack.	1 piece
Plinth panel.	No
Nuts included.	No
Package Depth.	880 millimeter
Package Height.	1700 millimeter
Package Width.	880 millimeter
Grounding kit.	Yes
Quick installation guide.	No
Product Gross Weight.	4500 gram
Adjustable feet.	Yes
Adjustable depth.	No
Cable management.	No
Preassembled.	Yes
Rail to Rail Length.	19 inch
Product Height.	1560 millimeter
Product Width.	800 millimeter
Product Depth.	800 millimeter
Material Thickness.	83.5 millimeter
Internal Height.	1422 millimeter
Internal Width.	795 millimeter
Min. Rack Depth.	290 millimeter
Max. Rack Depth.	550 millimeter
Internal Depth.	795 millimeter
Product Net Weight.	77000 gram
Package Content.	Grounding set
Color.	Light Grey
RAL Code.	RAL7035

