


NO.112111

标记	处数	分区	更改	日期

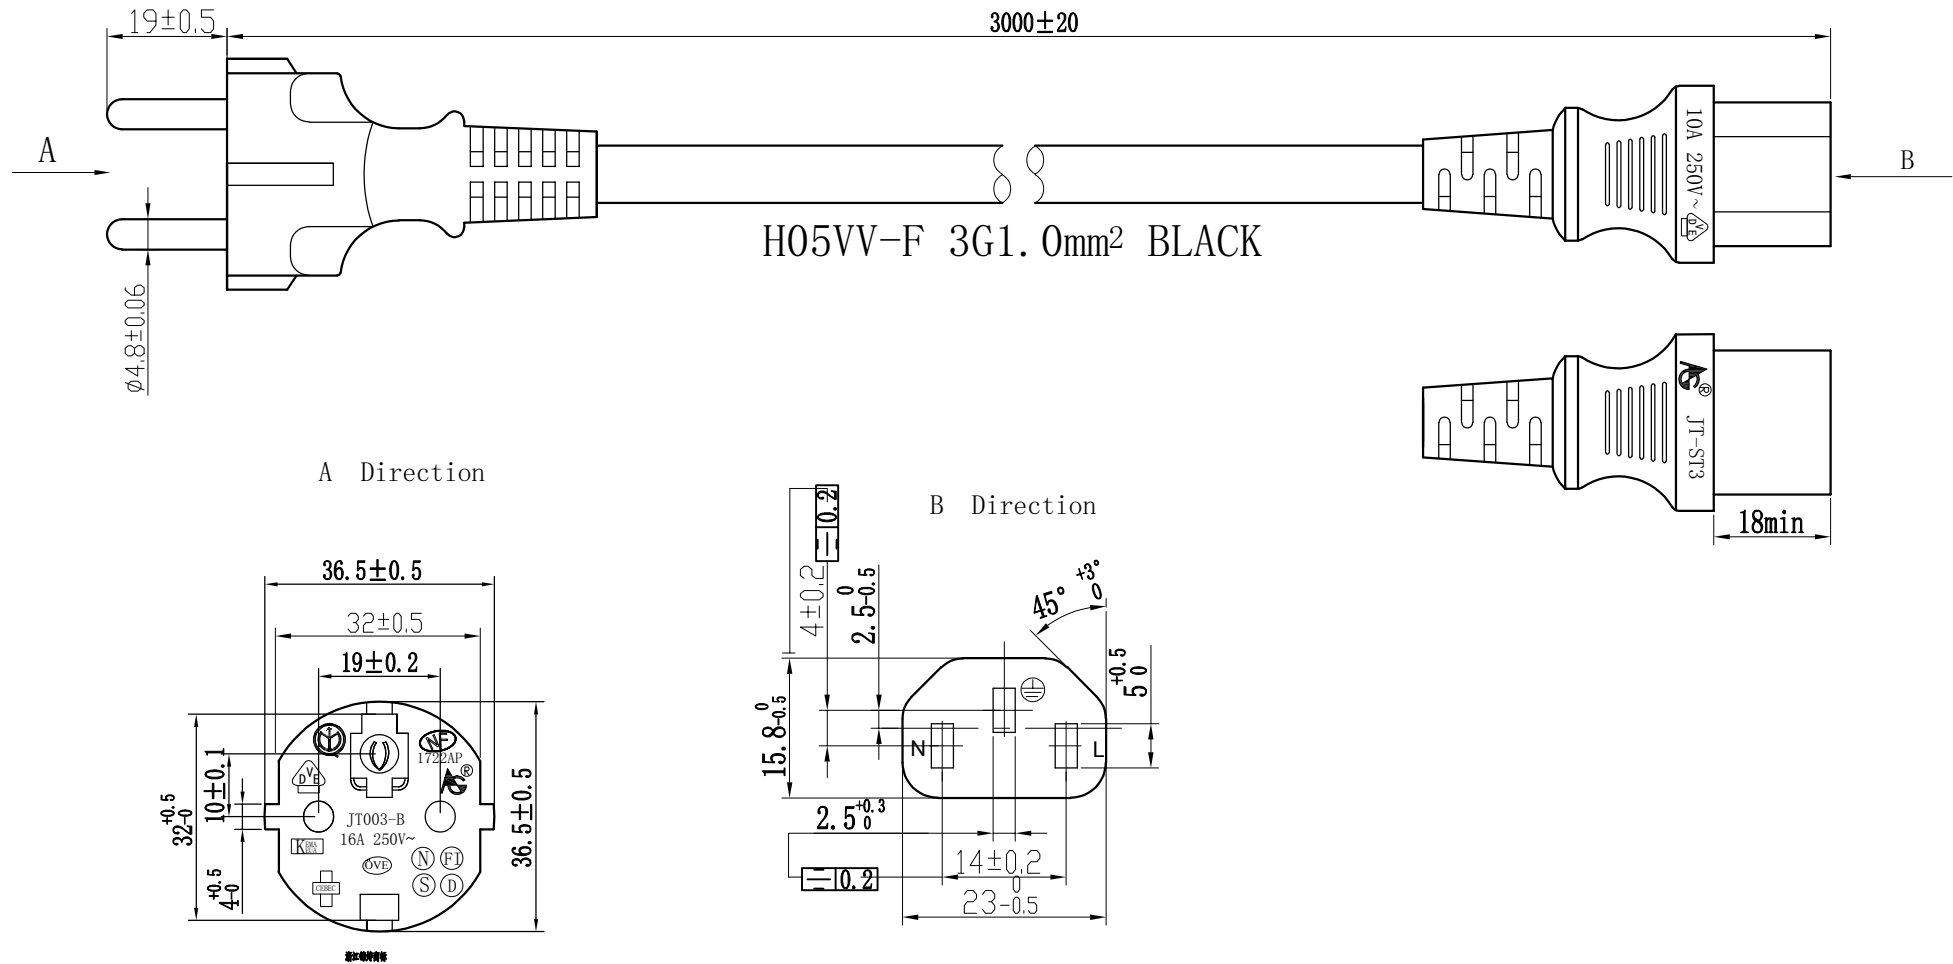

Notes:

- 1.Plug:JT003-B/JT-ST3 Clear injection no scratch and dirt;
2. Cable:H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.2$ Conductor $32 \times 0.198 \pm 0.004$ Core $\phi 2.6 \pm 0.1$
Cable Mark: $\triangle VDE \triangle$ H05VV-F 3G1.0mm² ZHEJIANG JINTONG NUCLEAR CABLE CO., LTD
3. Test:Hi-pot:Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA,insulation resistance no less than 5M Ω ,no strike out;

除非另有说明, 否则按此公差			第三角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张				
TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE SPECIFIED										
尺寸标注 DIMENSION	公差 TOLERANCE		版本 VERSION	A	比例 PROPORTION	1:1	单位 UNIT	mm	图框 SHAPE	A4
	长度 LENGTH	角度 ANGLE								
<200	± 0.1	± 0.5°	文件位置 FILE LOCATION							
200~500	± 0.3									
500~800	± 0.5									
<800	± 1.0									
图号 FIGURE NO			图号 FIGURE NO			材料特性 MATERIALS				
审核 AUDIT			图号 FIGURE NO			名称 DESCRIPTION				
批准 APPROVAL			图号 FIGURE NO							
PRODUCTOR NAME			122111							