
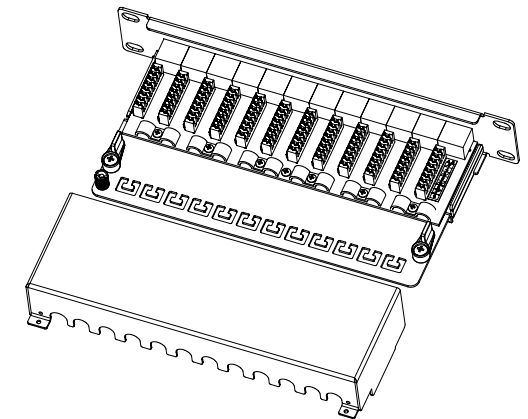
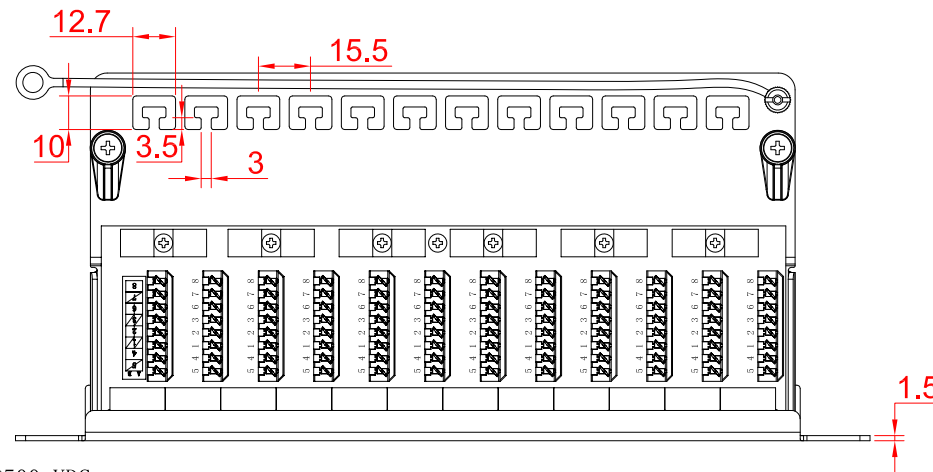
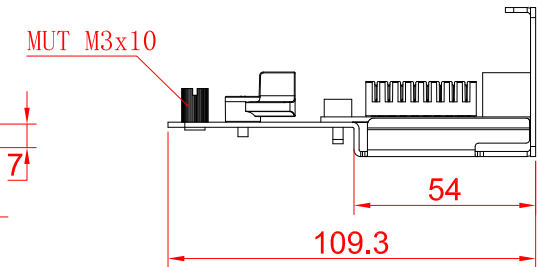


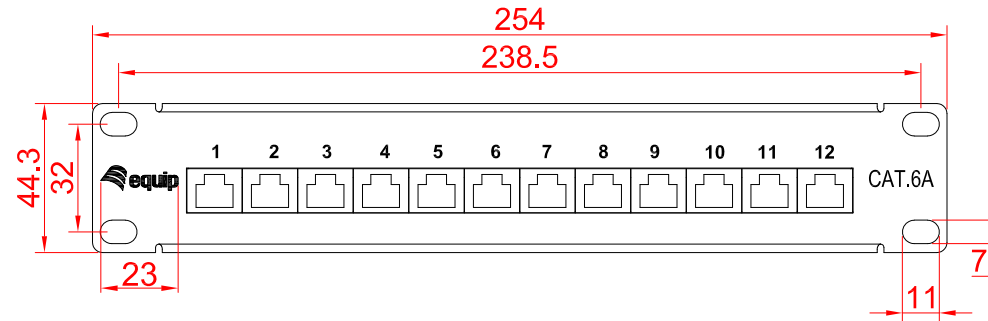

1:2

NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, SPCC1.5mm;
2. PCB MATERIAL:FR-4 T=1.6mm
3. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
4. SHIELD MATERIAL: STAINLESS STEEL, T=0.2mm
5. RJ45 JACK LIFE:750 TIMES MIN
6. IDC LIFE:200 TIMES MIN
7. WIRE:AWG 22-26

												
					Material					Item No.	326623	
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	12 Ports CAT.6A STP Patch Panel	
							A4	X:1	mm			
Drawn			Tolerance				A4	X:1	mm	ERP	Part No.	
Checked			0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30°									
Approved												
					Sheet	1 OF 1	Version: A/0					