
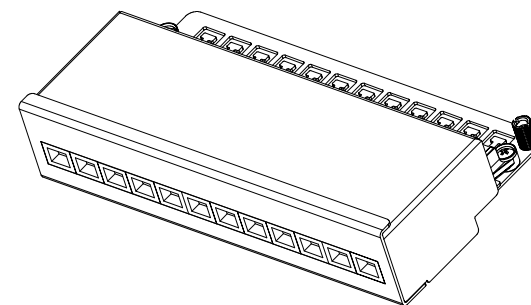
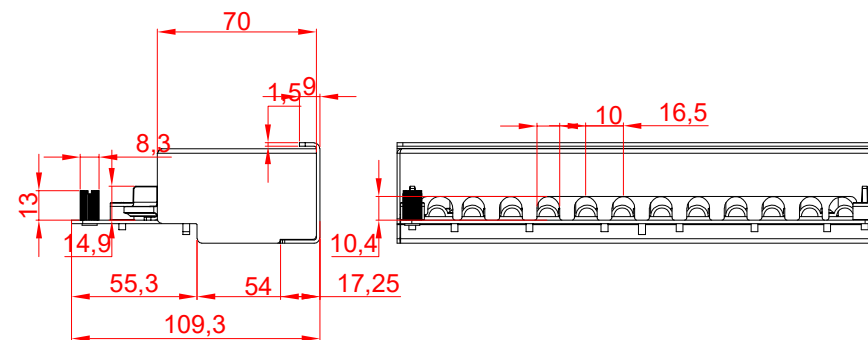
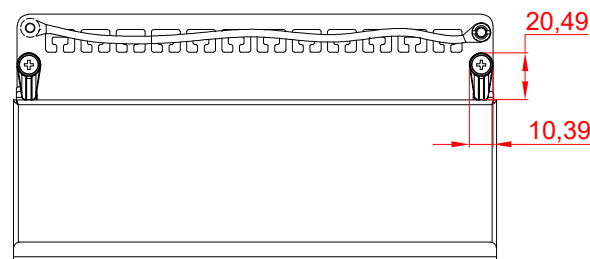
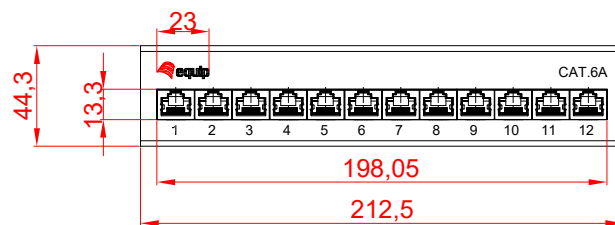


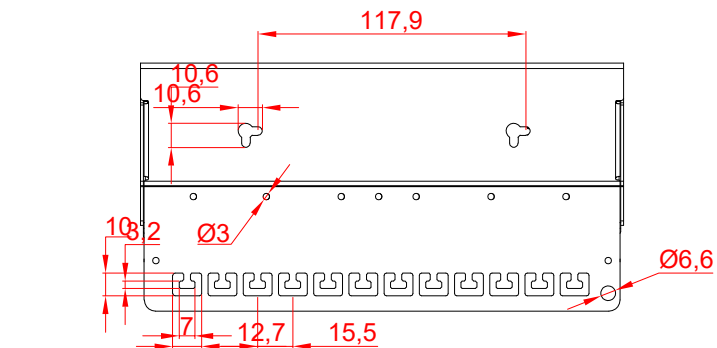

NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spec1.5mm;
2. PCB MATERIAL:FR-4 T=1.6mm
3. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
4. SHIELD MATERIAL: STAINLESS STEEL, T=0.2mm
5. RJ45 JACK LIFE:750 TIMES MIN
6. IDC LIFE:200 TIMES MIN
7. WIRE:AWG 22-26

											
					Material		ABS			Item No.	326522
					Angles Projection		Size	Scale	Unit	Part Name	12 Ports CAT.6A STP Patch Panel
SYM	Number	Bill No. of Alteration	Signature	Date			A4	X:1	mm		
Drawn	Ding jian bo	2015.12.11	Tolerance				A4	X:1	mm	ERP	Part No.
Checked	Ge pei jun	2015.12.11	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30°								
Approved	Wang wei jun	2015.12.11									
					Sheet	1 OF 1	Version: A/0				