NO.

标记	处数	分区	更改	日期

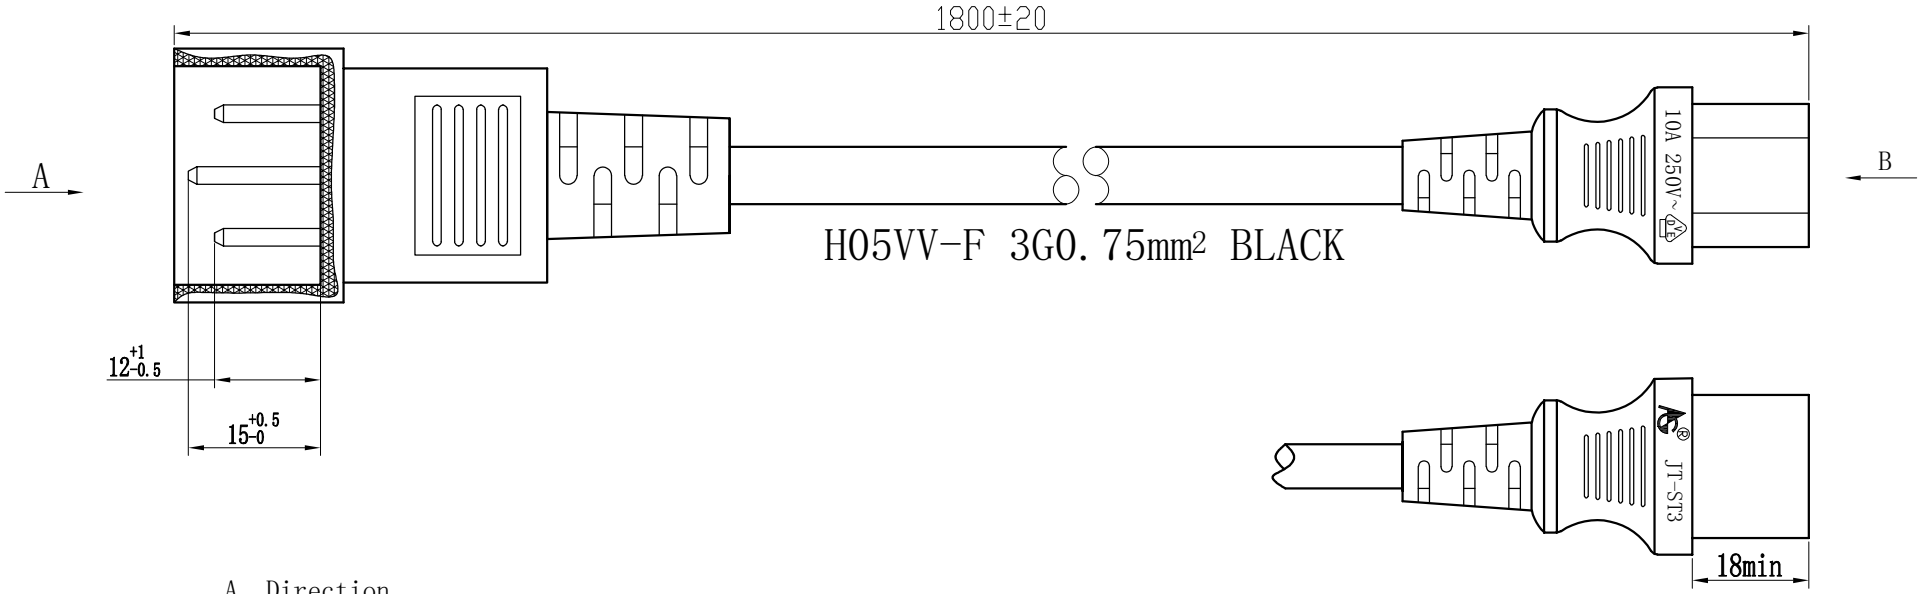

A Direction

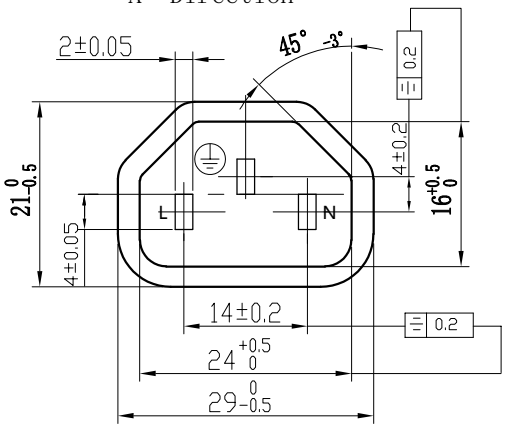

B Direction

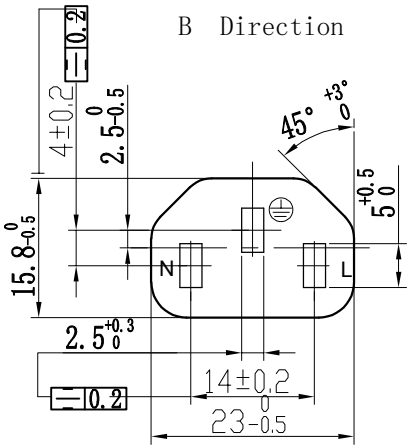

Notes:

1. Plug:JT-ST3/JT-SZ3 Clear injection no scrath and dirt;
2. Cable:H05VV-F 3G1.0mm² Jacket ϕ6.5±0.1 Conductor 24*0.198±0.004 Coreϕ2.4±0.1
   Cable Mark:◁VDE▷ H05VV-F 3G0.75mm² ZHEJIANG JINTING NUCLEAR CABLE CO.,LTD
3. Test:Hi-pot:lnner Voltage AC2500V/1S External Voltage AC4000V/1S
   current leakage 1mA,insulation resistance no less than 5MΩ,no strike out;

除非另有说明，百明公差按下表：
TOLERANCE ACCORDING TO THIS FORM UNLESS OTHERWISE INDICATED

尺寸标注 DIMENSION	公差 TOLERANCE 长度 LENGTH	角度 ANGLE
<200	±0.1	±0.5°
200～500	±0.3	
500～800	±0.5	
<800	±1.0	

第三角度投影 THE THIRD ANGLE PROJECTION			第X张	共X张	
版本 VERSION	A	比例 PROPORTION	1:1	单位 UNIT mm	图幅 MAPS A4
文件位置 FILE LOCATION					
图号 FIGURE NO			树脂材料 RESIN MATERIALS		
模号 DIE NO.			收缩率 SHRINKAGE		
设计 DESIGN		PRODUCTOR NAME	112100	equip®	
审核 AUDIT					
批准 APPROVAL					