
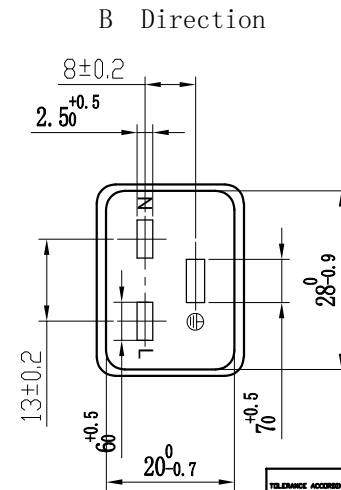
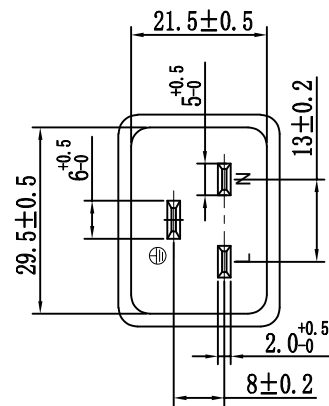


NO.112131

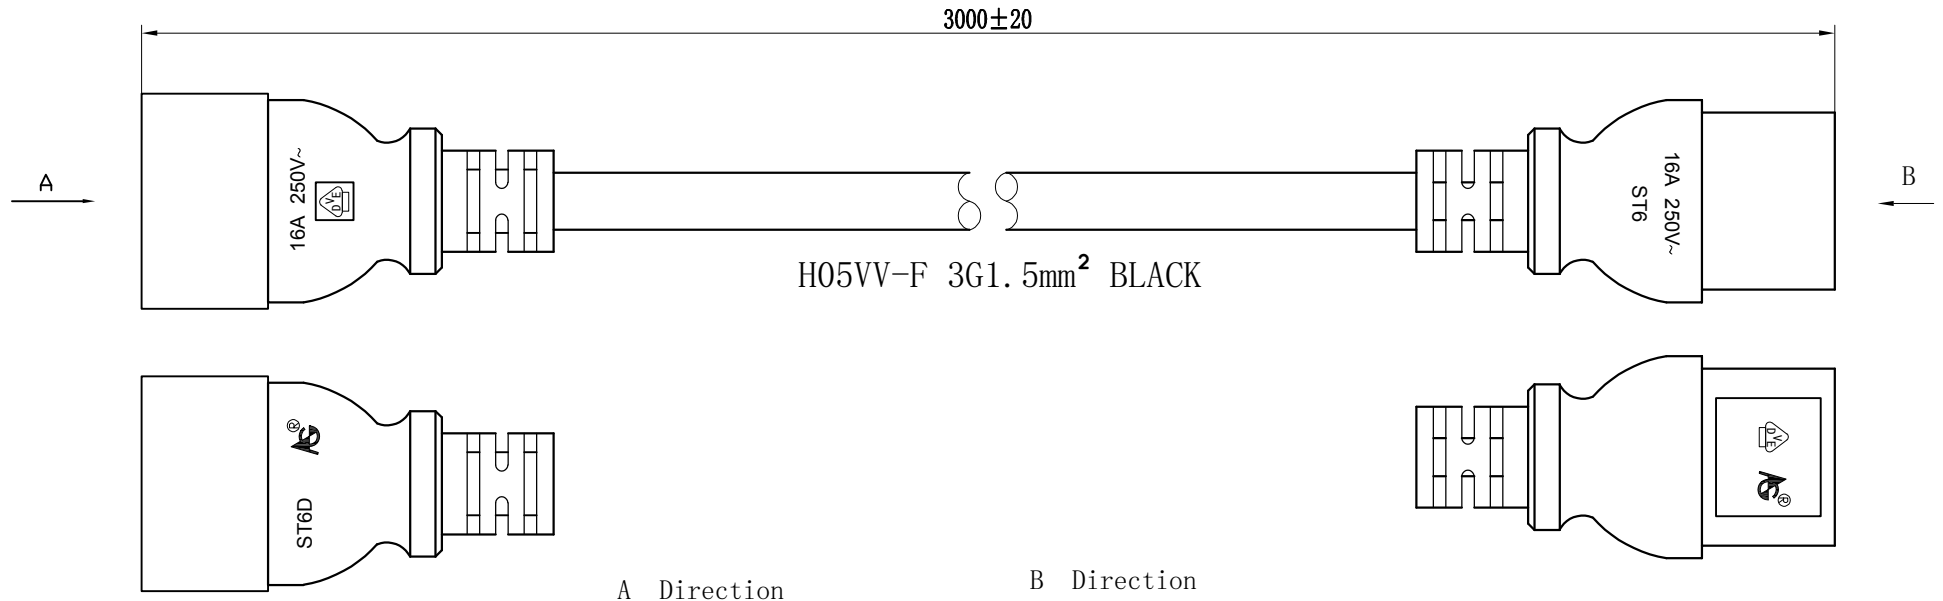

Notes:

1. Plug:ST6D/ST6 Clear injection no scratch and dirt;
2. Cable:H05VV-F 3G1.5mm² Jacket $\phi 8.0 \pm 0.2$ Conductor $48 \times 0.198 \pm 0.004$ Core $\phi 3.0 \pm 0.1$;
Cable Mark: $\triangleleft VDE \triangleright$ H05VV-F 3G1.5mm² ZHEJIANG JINTONG NUCLEAR CABLE CO., LTD
3. Test:Hi-pot:Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA,insulation resistance no less than 5M Ω ,no strike out;

尺寸标注		公差		第三角度投影			第X张 共X张			
DIMENSION		TOLERANCE		版本	A	比例	UNIT	mm	HPS	A4
长度	LENGTH	公差	ANGLE	文件位置	FILE LOCATION	1:4:1				
<200	±0.1	±0.5°		图号	FIGURE NO		树脂材料	RESIN MATERIALS		
200~500	±0.3			图号	FIGURE NO		版本号	VERSION		
500~800	±0.5			图号	FIGURE NO		版本号	VERSION		
<800	±1.0			图号	FIGURE NO		版本号	VERSION		
设计	DESIGN	PRODUCOR NAME		122131						
审核	AUDIT									
批准	APPROVAL									